

FL 1100 XT C DMX




Having a remarkable exterior environment requires a superior lighting solution.

The FL 1100 XT C DMX Series is weatherproof and waterproof. It cuts energy consumption by at least 63% compared to halogen generators plus it boasts a high LED quality. The range includes warm white light and neutral white light solutions plus it holds dimmable options. The FL 1100 XT C DMX generators are easy to handle and endure long life.

This series offers a range of functional and decorative possibilities which can transform your fountains, public art, facades, parks, gardens, swimming pools and create eye-striking outdoor areas.

FL 1100 XT C DMX

- For outdoor use
- Indoor models available
- For use with fibre optic lighting
- LED expected lifetime 35.000 hours
- White light 3.000K or neutral white light 4.000K
- Integrated electronic driver
- Dimmable
- Black finish
- Light port: Ø9/Ø28 mm

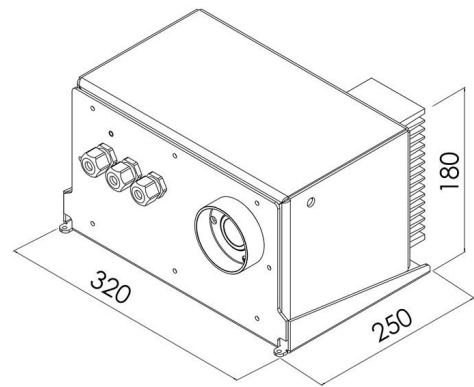

IP 65

3,3 Kg

FL 1100 XT C DMX



Light port	Ø9/Ø28 mm
Fibre type	PMMA or glass
Material	Aluminium, plastic and other
Total power consumption	55W
LED power consumption	37W/36W (LC/LN)
LED lifetime expected	35.000h
Driver lifetime, expected	>50.000h (@Ta=3% failure level)
Supply voltage (mains)	100-240V 50/60Hz
Dimmer systems applicable	Pot, DALI, PWM and PUSH (mains)
Thermal protection	Automatic resettable
Cooling system	Natural convection, Integrated fan
Ambient temperature	-10°C to 40°C
Applied LED	LC Cree / LN Nichia
CCT (nominal)	3000K / 4000K / 3 SDC
CRI _s (Ra) typical value	93 (min. 90) / 98 (min. 95)

	Item no.
FL 1100 XT C DMX Colour LC 3000K CRI 90+	0138 0318
FL 1100 XT C DMX Colour LC 4000K CRI 90+	0138 0328
FL 1100 XT C DMX Colour LN 3000K CRI 90+	0138 0358
FL 1100 XT C DMX Colour LN 4000K CRI 90+	0138 0368
FL 1100 XT C DMX Twinkle LC 3000K CRI 90+	0138 1318
FL 1100 XT C DMX Twinkle LC 4000K CRI 90+	0138 1328
FL 1100 XT C DMX Twinkle LN 3000K CRI 90+	0138 1358
FL 1100 XT C DMX Twinkle LN 4000K CRI 90+	0138 1368
FL 1100 XT C DMX Dual LN 3000K CRI 90+	0138 0418
FL 1100 XT C DMX Dual LN 4000K CRI 90+	0138 0428
FL 1100 XT C DMX Dual LC 3000K CRI 90+	0138 0458
FL 1100 XT C DMX Dual LC 4000K CRI 95+	0138 0459

RobLight

RobLight A/S, Nordhavnsvej 1A, DK-9900 Frederikshavn, T: +45 9244 4888, E: info@rob-light.com, www.rob-light.com

RobLight accepts no responsibility for possible errors in catalogues, brochures and other printed material.

RobLight reserves the right to alter or discontinue its products without notice. © 2019 RobLight A/S