


Essential 2RL Clear

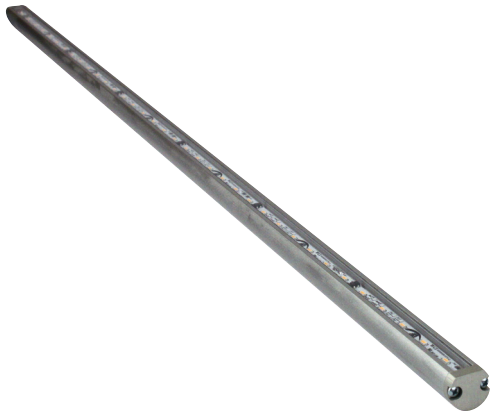

Essential 2RL Clear. For indoor and damp locations. For display, decorative and task lighting. For lighting objects and surfaces. For showcases, niches, shelves, walls and many other applications. Multiple colour temperatures. Multiple configurations. Surface-mounted or recessed. Opal models available.

From the Essential series. Consistent, uniform light. Excellent light output. High CRI. Nichia LED technology. Easy to install. Easy to move. Easy to reuse. Hard-working, high-quality, low-energy light in tiny multipurpose conduits. LED lighting made simple.


Essential 2RL Clear

For indoor use/damp locations
 Multiple mounting options
 Conduit min. 120 mm, max. 2.42 m
 16 mm between LEDs
 Default wire length 2.44 m
 Anodised aluminium
 Clear acrylic cover
 Opal models also available
 Operating ambient temperature -30° to +40°
 2,700 K, 3,000 K, 3,500 K, 4,000 K or 4,500 K
 Beam angle 94°
 Dimmable
 Constant Voltage 24 V
 Nichia LED technology
 CRI (Ra) 85
 Five-year warranty
 LED standard lifetime 50,000 hours
 Fixture luminous flux 866 to 1063 lm/m
 Fixture luminous efficacy 48 to 58 lm/W

RoHS  

Vertical Essential 2RL Clear

 **18W**
per m conduit **IP 64** **0.24 kg**
per m conduit




	Item no.	
Black	2,700 K	1993 1112
	3,000 K	1993 1113
	3,500 K	1993 1114
	4,000 K	1993 1115
	4,500 K	1993 1116

	Item no.	
Grey	2,700 K	1993 1012
	3,000 K	1993 1013
	3,500 K	1993 1014
	4,000 K	1993 1015
	4,500 K	1993 1016

Horizontal Essential 2RL Clear

Height min. 25 mm, max. 0.5 m
 Legs Ø8 mm

 **18W**
per m conduit **IP 64** **0.24 kg**
per m conduit




	Item no.	
Black	2,700 K	1993 2112
	3,000 K	1993 2113
	3,500 K	1993 2114
	4,000 K	1993 2115
	4,500 K	1993 2116

	Item no.	
Grey	2,700 K	1993 2012
	3,000 K	1993 2013
	3,500 K	1993 2014
	4,000 K	1993 2015
	4,500 K	1993 2016

Free-mounted Essential 2RL Clear

18W
per m conduit **IP 64** **0.24 kg**
per m conduit



	Item no.	
Black	2,700 K	1993 0112
	3,000 K	1993 0113
	3,500 K	1993 0114
	4,000 K	1993 0115
	4,500 K	1993 0116

	Item no.	
Grey	2,700 K	1993 0012
	3,000 K	1993 0013
	3,500 K	1993 0014
	4,000 K	1993 0015
	4,500 K	1993 0016

Product, photometric, driver, mounting & accessory information available at www.roblon.com

Roblon accepts no responsibility for possible errors in catalogues, brochures or other printed and electronic material. Roblon reserves the right to alter or discontinue its products without notice. © 2012, Roblon A/S 110716