


Essential 2SL Clear

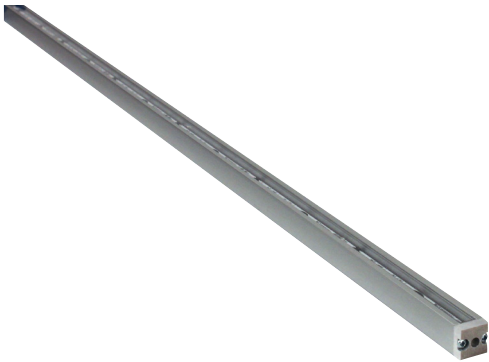

Essential 2SL Clear. For indoor and damp locations. For display, decorative and task lighting. For lighting objects and surfaces. For showcases, niches, shelves, walls and many other applications. Multiple colour temperatures. Multiple configurations. Surface-mounted or recessed. Fixed or adjustable. Opal models available.


From the Essential series. Consistent, uniform light. Excellent light output. High CRI. Nichia LED technology. Easy to install. Easy to move. Easy to reuse. Hard-working, high-quality, low-energy light in tiny multipurpose conduits. LED lighting made simple.

Essential 2SL Clear

For indoor use/damp locations
 Recessed or surface-mounted
 Adjustable or fixed mounting clips
 Conduit min. 120 mm, max. 2.42 m
 16 mm between LEDs
 Default wire length 2.44 m
 Anodised aluminium
 Clear acrylic cover
 Opal models also available
 Operating ambient temperature -30° to +40°
 2,700 K, 3,000 K, 3,500 K, 4,000 K or 4,500 K
 Beam angle 94°
 Dimmable
 Constant Voltage 24 V
 Nichia LED technology
 CRI (Ra) 85
 Five-year warranty
 LED standard lifetime 50,000 hours
 Fixture luminous flux 866 to 1063 lm/m
 Fixture luminous efficacy 48 to 58 lm/W

RoHS CE 

Essential 2SL Clear

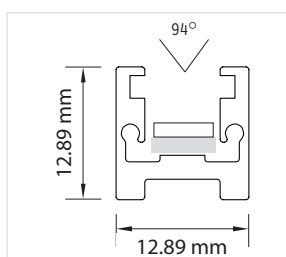

18W
 per m conduit

IP 64

0.24 kg
 per m conduit

	Item no.	
Black	2,700 K	1992 0102
	3,000 K	1992 0103
	3,500 K	1992 0104
	4,000 K	1992 0105
	4,500 K	1992 0106

	Item no.	
Grey	2,700 K	1992 0002
	3,000 K	1992 0003
	3,500 K	1992 0004
	4,000 K	1992 0005
	4,500 K	1992 0006

Product, photometric, driver, mounting & accessory information available at www.roblon.com

Roblon accepts no responsibility for possible errors in catalogues, brochures or other printed and electronic material. Roblon reserves the right to alter or discontinue its products without notice. © 2012, Roblon A/S 090812